

01-27-00

Docket No.: M-8066 US

January 24, 2000

JC135 U.S. PTO  
09/490795  
01/24/00

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D. C. 20231

Enclosed herewith for filing is a patent application, as follows:

Inventor(s): Gary J. Verdun  
Title: Rambus Memory Power Management Through Active Pool Management Policies Tailored To Portable Computer User Scenarios

<u>X</u>	<u>Return Receipt Postcard</u>
<u>X</u>	This Transmittal Letter (in duplicate)
<u>16</u>	page(s) Specification (not including claims)
<u>6</u>	page(s) Claims
<u>1</u>	page Abstract
<u>9</u>	Sheet(s) of Drawings
<u>3</u>	page(s) Declaration For Patent Application and Power of Attorney
<u>1</u>	page(s) Recordation Form Cover Sheet (in duplicate)
<u>1</u>	page(s) Assignment
<u>1</u>	page(s) Information Disclosure Statement
<u>2</u>	page(s) PTO Form 1449 citing 12 references
<input checked="" type="checkbox"/>	Copy(ies) of 8 Cited References submitted

**CLAIMS AS FILED**

For	Number		Number		Rate		Basic Fee
	<u>Filed</u>		<u>Extra</u>				\$ <u>\$690.00</u>
Total Claims	24	-20 =	4	x	\$18.00 =		\$ 72.00
Independent Claims	2	-3 =	0	x	\$78.00 =		\$ 0.00
<input type="checkbox"/>	Application contains one or more multiple dependent claims ( total fee)						\$
<input type="checkbox"/>	Fee for Request for Extension of Time						\$


Please make the following charges to Deposit Account 19-2386:

- ☒ Total fee for filing the patent application in the amount of \$ 762.00  
☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account 19-2386.

EXPRESS MAIL LABEL  
NO:

EL252928578US

Respectfully submitted,

  
Dale R. Cook  
Attorney for Applicant  
Reg. No. 42,434

25 Metro Drive, Suite 700  
San Jose, CA 95110  
Phone 408 453-9200  
Fax 408 453-7979

Austin, TX  
Newport Beach, CA  
San Francisco, CA

594182 v1

01/24/00  
JC759 U.S. PTO

09/490795 01/24/00

"Express Mail" mailing label number:

EL252928578US

RAMBUS MEMORY POWER MANAGEMENT THROUGH ACTIVE POOL MANAGEMENT  
POLICIES TAILORED TO PORTABLE COMPUTER USER SCENARIOS

Gary J. Verdun

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates, in general, to power management of memory devices in data processing systems.

Description of the Related Art

10 Data processing systems are systems that manipulate, process, and store data and are notorious within the art. Personal computer systems, and their associated subsystems, constitute well known examples of data processing systems.

Personal computer systems typically utilize memory devices.  
15 One type of memory device so utilized is known in the art as RAMBUS Dynamic Random Access Memory, or RDRAM. RDRAM is a proprietary type of computer memory developed by Rambus, Inc. of Mountain View, California, and has been adopted for use by Intel Corporation of Santa Clara, California.

20 Operation of RDRAM computer memory devices consumes considerable amounts of power and produces considerable amounts of heat. In many data processing systems (e.g., portable computer systems such as notebook and subnotebook computer systems) power and heat management constitute significant design concerns. These power  
25 and heat management design concerns have been recognized by RDRAM designers and developers, and thus the RDRAM specification provides defined power management polices.

The inventor named herein has discovered, and such discovery forms part of the inventive content described herein, that RDRAM  
30 power management policies can be used in conjunction with defined

user scenarios in order to provide specific users with near-optimum power management and performance.

SUMMARY OF THE INVENTION

5 The inventors named herein have devised a method and related computer system that allow power management policies can be used in conjunction with defined user scenarios in order to provide specific users with near-optimum power management and performance.

10 In one embodiment, a method and related computer system allow recalling at least one memory pooling profile, in response to user input, and pooling data processing system memory devices in response to the at least one memory pooling profile.

15 The foregoing is a summary and thus contains, by necessity, simplifications, generalizations and omissions of detail; consequently, those skilled in the art will appreciate that the summary is illustrative only and is not intended to be in any way limiting. Other aspects, inventive features, and advantages of the present invention, as defined solely by the claims, will become apparent in the non-limiting detailed description set forth below.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention may be better understood, and its numerous objects, features, and advantages made apparent to those skilled in the art by referencing the accompanying drawings.

5        Figure 1A shows an illustration of graphical user interface 150 having selectable options.

Figure 1B shows graphical user interface 150, but with the discrete choice fields of performance/power levels specification box 102 replaced with "slider" 104.

10        Figure 2 shows a process illustrating that in response to user input to application specification box 100 and performance/power levels specification box 102, the number of devices in memory pool A and pool B will be adjusted to meet certain user requirements.

15        Figures 3 and 4 illustrate how a lower bound pooling policy of a maximum battery life zone is determined.

Figures 5 and 6 illustrate how an upper bound pooling policy of a standard performance zone is determined.

20        Figure 7 depicts a pictorial representation of a conventional data processing system which can be utilized in accordance with illustrative embodiments of the graphical user interfaces and processes described herein.

Figure 8 depicts selected components of data processing system 720 in which illustrative embodiments of the graphical user interfaces and processes described above can be implemented.

25        The use of the same reference symbols in different drawings indicates similar or identical items.

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

The following sets forth a detailed description of the best contemplated mode for carrying out the independent invention(s) described herein. The description is intended to be illustrative and should not be taken to be limiting.

It has been discovered by the inventor named herein that various computer software applications have memory requirements that differ from each other. It has also been discovered that individual computer users typically tend to utilize only a certain limited number of such computer applications. For example, a business traveler utilizing a portable computer on a plane may typically only utilize his word-processing software. The inventor named herein has devised a process and device that manage RAMBUS memory pools based upon user input specifying what particular applications program(s) the user is most likely to utilize and what power/performance levels the user prefers to experience when running the particular applications program(s). The process and device make use of various empirically determined pooling profiles in order to manage RAMBUS memory pools in a fashion such that substantially optimum power management for individual users can be achieved.

The Rambus RDRAM specification defines RDRAM power draw specifications in the *Rambus Direct RDRAM 128/144-Mbit (256Kx16/18x32s) Specification*, available from the RAMBUS Corporation of Mountain View, California, USA, hereby incorporated by reference in its entirety, as follows:

RDRAM Memory Status	I <sub>DD</sub>	Response Time
Active	100% ( $\cong$ 148 mAmps)	$\cong$ substantially immediate -- 1-4 bus clock cycles
Standby	68% ( $\cong$ 101 mAmps)	$\cong$ intermediate response time -- $\cong$ 10-20 bus clock cycles)
Nap State	3% ( $\cong$ 4.2 mA)	$\cong$ very long response time -- $\cong$ 100 ns)

TABLE 1

Intel Corporation has included RDRAM in its chipsets, and has extended the power management capabilities associated with RDRAM. Specifically, Intel has allowed designers the ability to specify "pools" of RDRAM devices. An example of such pool specifications, drawn from the *Intel 820 Chipset: 82820 Memory Controller Hub (MCH) Specification*, available from the Intel Corporation of Santa Clara, California, USA hereby incorporated by reference in its entirety, is as follows:

	Pool A -- Up to 8 RDRAM Devices, only 4 of which can be active at any one time	Pool B -- By definition those RDRAM devices not in Pool A
Device Status	Either Active or Standby	Nap Mode

TABLE 2

Intel Corporation lets the designer specify how many devices are in Pool A or Pool B at any one time. The inventor named herein has discovered that he can dynamically manage the number of devices in the pools in response to user input such that near-optimum power management with respect to such memory devices is achieved.

With reference now to Figure 1A, shown is an illustration of graphical user interface 150 having selectable options in accord with the present invention. Depicted is application specification box 100. As noted, the user is given the option to select the applications which the user is most likely to use. Illustrated in application specification box 100 are a few examples of the options the user may select, such as word processing, palm-top organizer, calendar program, web browser, communications package, voice recognition program, spread sheet, etc.

Also shown is performance/power levels specification box 102. Depicted is that the user is given several options, such as maximum performance, standard performance -- high end, standard performance -- low end (slightly worse standard performance, but with more battery life), and maximum battery life. In one embodiment, "maximum performance" refers to memory device pooling such that users discernible response time is substantially minimized for the one or more selected applications, and will generally represent the maximum power draw for the one or more selected applications, "standard performance -- high end" (slightly better standard performance, but

having less battery life) refers to memory pooling such that what is defined as "minimal" user discernible performance degradation will be present for the one or more selected applications, "standard performance -- low end" (slightly worse standard performance, but  
5 having more battery life) refers to memory pooling such that what is defined as "minimal" user discernible performance degradation will be present for the one or more selected applications, while "maximum battery life" refers to memory pooling such that there is  
10 "noticeable" user detectable performance degradation but which is acceptable to users for the sake of substantially minimizing battery drain for the sake of maximizing battery life.

Referring now to Figure 1B, shown is graphical user interface 150 of Figure 1A, but with the dessert choice fields of performance/power levels specification box 102 replaced with "slider"  
15 104. "Slider" 104 allows slightly more fine adjustment than that available via the discrete selections available as shown in Figure 1A.

In addition to the foregoing, in another embodiment, the presence of AC power to the system is monitored, and in the event  
20 that AC power becomes available the system automatically switches to maximum performance mode, since with AC power present it can generally be assumed that power management is not as critical as when battery power is in use.

Referring now to Figure 2, shown is a process illustrating that  
25 in response to user input to application specification box 100 and performance/power levels specification box 102, the number and/or state of devices in memory pool A and pool B (see table 2) will be adjusted to meet certain user requirements. Method step 200 shows the start of the process. Method step 202 depicts recalling at least  
30 one empirically determined memory pooling profile, in response to user input such as that illustrated in relation to graphical user interface 150 in Figure 1. That is, subsequent to a human user selecting one or more application programs to be run and a power/performance level at which the data processing system running  
35 the selected applications programs is to perform, the at least one empirically determined memory pooling profile is recalled. Thereafter, method step 204 shows pooling data processing system memory devices in response to the at least one memory pooling profile, where "pooling memory devices" refers to placing RDRAM  
40 devices in either Pools A and B and designating devices in pool A to

be in either active or standby states. Subsequently, shown is that the process proceeds to method step 206 and stops.

As was noted above, application specification box 100 of Figure 1 allows the selection of more than one specific application. In one embodiment, when the user specifies a performance/power level via performance/power levels specification box 102, the pooling profile referred to in method step 202 consists of an average is drawn on the individual pooling profiles for each of the applications selected (e.g., if word processing and spread sheet are selected, and the performance/power level is specified to be standard--high end, devices activated will be the average of the standard--high end device for both the spreadsheet and word processor. Alternatively, in another embodiment, application specific pooling profiles are activated in response to activation of individual ones of the selected application programs. Yet still alternatively again, of the pooling profiles associated with the one or more application programs selected, that pooling profile having the most active memory devices is the one selected.

Referring now to Figure 3, shown is a process by which a portion of the various performance/power levels referred to above are determined for various applications. Method step 300 shows the start of the process. Method step 302 depicts that a specified application (e.g., Microsoft Word) is loaded onto a specific computer (e.g., a portable computer system that utilizes Rambus DRAM). Method step 304 illustrates that all RDRAM devices in the specific computer are placed in pool A (see table 2) and made active. Method step 306 shows that a human user is given a set of defined common tasks for the loaded application (e.g., cut, paste, scroll up, scroll down, find, find and replace tasks for Microsoft Word) and asked to perform the tasks on the data processing system utilizing a given defined "test" document. Method step 308 illustrates that the human user is instructed to record the performance as maximum performance for each task performed in specific recordation categories, where the recordation categories are for assessment are "maximum performance," "acceptable performance," and "unacceptable performance," where "maximum performance" is defined to be that the response of the data processing system is indistinguishable from the first time the human user performs the defined tasks (in the first instance of the performance all memory devices are in Pool A and are active), and where "acceptable performance" is defined to be that the response of



the system is not "maximum performance" but is still acceptable to the user, and where "unacceptable performance" is defined to mean that the user does not consider that he or she could make any acceptable use of the application having the performance characteristics. That is, the human user is instructed that performance of the application the first time through, with all possible memory devices activated, is the "baseline" performance against which subsequent performances of the application are to be measured, and thus the first time through the process described in relation to Figure 3, the user is to mark all tasks as having "maximum performance."

Method step 310 shows the inquiry as to whether the user has marked any task as having "unacceptable performance." If the inquiry of method step 310 yields a determination that a task was marked unacceptable, the process proceeds to method step 311, which shows that one DRAM is moved back to Pool A and set "active" (in order to restore the system to the last state in which it had acceptable performance. Thereafter, the process proceeds to method step 312 which illustrates the start of the "set lower bounds of acceptable performance zone process" (which is equivalent to setting the lower bounds of a maximum battery life zone, as is explained below) of Figure 4.

If the inquiry of method step 310 yields a determination that a task was NOT marked unacceptable, the process proceeds to method step 314 which illustrates that one DRAM device is moved to pool B (i.e., put to "nap"). Thereafter, the process returns to method step 306 and continues from that point.

At the completion of the process shown in Figure 3, it is known what minimum number of active pool A memory devices is necessary to obtain the performance that the user finds acceptable (i.e., the number of active memory devices in Pool A when the process described in Figure 3 terminates and proceeds to Figure 4).

With reference now to Figure 4, illustrated is "set lower end of acceptable performance zone process." Recall that pool A devices can be placed into an "standby" mode, which actually consumes less power than active mode. The process of Figure 3 gave the minimum number of active devices in pool A required for acceptable performance. The process of Figure 4 determines how many (if any) of such minimum number of active devices can be placed in standby state

before the user finds the performance of the system unacceptable. Accordingly, method step 400 shows setting a "number of pool A devices in 'active' state" counter equal to the number of devices in pool A, where such number is the result of the operations described in Figure 3. Method step 402 shows setting a "number of pool A devices in 'standby' state" counter equal to zero. Thereafter, method step 403 depicts setting one currently "active" pool A RDRAM device to "standby." Subsequently, in response to the operation depicted in method step 403, method step 404 illustrates subtracting one from a "number of pool A devices in 'active' state" counter. Thereafter, again, in response to the operation depicted in method step 403, method step 405 shows adding one to the "number of pool A devices in 'standby' state" counter.

Method steps 406-410 function in substantially the same fashion as method steps 306-310, described above. In the event that the inquiry of method step 410 yields determination that the user has marked the performance of at least one task unacceptable, the process proceeds to method step 412, wherein is depicted that for the application under test, the process defines the lower bounds of "acceptable performance" to be a system having a number of pool A active devices equal to the current value within the "number of pool A devices in 'active' state" counter + 1 (the number 1 is added since the current number of active devices gives unacceptable performance, and thus one of the standby devices needs to be reactivated to return to acceptable performance), and a number of pool A devices in a standby state equal to the current value within the "number of pool A devices in 'standby' state" counter - 1 (the number 1 is subtracted since the current number of active devices gives unacceptable performance, and thus one of the standby devices needs to be reactivated to return to acceptable performance). Thereafter, the process proceeds to method step 414 and stops.

In the event that the inquiry of method step 410 yields determination that the user has NOT marked the performance of at least one task unacceptable, the process proceeds to method step 403 and proceeds from that point.

The processes illustrated in Figures 3 and 4 have set the lower bounds of acceptable performance for the application under test. Consequently, since a used herein the "maximum battery life" selection in Figure 1 equates to the absolute minimum acceptable performance, it is known that the lower bound of the "maximum battery

life" zone equates to the lower bounds of acceptable user performance defined by the operations of Figures 3 and 4. Figure 5 and 6 show how in one embodiment the upper bounds of a standard performance zone are set.

5

Referring now to Figures 5 and 6, shown is a process which defines the minimum number of pool A active devices necessary to achieve maximum user defined performance. Method step 500 shows the start of the process. Method step 502 depicts that a specified application (e.g., Microsoft Word) is loaded onto a specific computer (e.g., a portable computer system utilizing Rambus DRAM). Method step 504 illustrates that all devices are placed in pool A and made active. Method step 506 shows that a human user is given a set of defined common tasks for the loaded application (e.g., cut, paste, scroll up, scroll down, find, find and replace tasks for Microsoft Word) and asked to perform the tasks on the specific computer utilizing a given defined document. Method step 508 illustrates that the human user is instructed to record the performance as maximum performance for each task performed in specific recordation categories, where the recordation categories are for assessment are "maximum performance," "acceptable performance," and "unacceptable performance," where "maximum performance" is defined to be that the response of the data processing system is indistinguishable from the first time the human user performs the defined tasks (in the first instance of the performance all memory devices are in Pool A and are active), and where "acceptable performance" is defined to be that the response of the system is not "maximum performance" but is still acceptable to the user, and where "unacceptable performance" is defined to mean that the user does not consider that he or she could make any acceptable use of the application having the performance characteristics. That is, the human user is instructed that performance of the application the first time through, with all the memory devices activated, is the "baseline" performance against which subsequent performances of the application are to be measured, and thus the first time through the process described in relation to Figure 5, the user is to mark all tasks as having "maximum performance."

Method step 510 shows the inquiry as to whether the user has marked any task as having less-than-maximum performance. If the inquiry of method step 510 yields a determination that a task has been marked as having less-than-maximum performance, the process proceeds to method step 511, which shows that one DRAM is moved back

to Pool A and set "active" (in order to restore the system to the last state in which it had acceptable performance. Thereafter, the process proceeds to method step 512 which depicts the start of the "set higher end of standard performance zone process" of Figure 6.

5           If the inquiry of method step 510 yields a determination that a task has NOT been marked as having less-than-maximum performance, the process proceeds to method step 514 which illustrates that one DRAM device is moved to pool B (i.e., put to "nap"). Thereafter, the process returns to method step 506.

10           At the completion of the process shown in Figure 5, it is known what minimum number of pool A memory devices are necessary to obtain the performance the user finds equivalent to "maximum performance" (i.e., the number of memory devices in the pool when the process described in Figure 5 terminates).

15           With reference now to Figure 6, illustrated is "set higher end of standard performance zone process." Recall that pool A devices can be placed into an "standby" mode, which actually consumes less power than active mode. The process of Figure 5 gave the minimum number of active devices in pool A required for "maximum  
20 performance." The process of Figure 6 determines how many (if any) of such minimum number of active devices can be placed in standby state before the user finds the performance of the system to be less-than-maximum. Accordingly, method step 600 shows setting a "number of pool A devices in 'active' state" counter equal to the number of  
25 devices in pool A, where such number is the result of the operations described in Figure 5. Method step 602 shows setting a "number of pool A devices in 'standby' state" counter equal to zero. Thereafter, method step 603 depicts setting one currently "active" pool A RDRAM device to "standby." Subsequently, in response to the  
30 operation depicted in method step 603, method step 604 illustrates subtracting one from a "number of pool A devices in 'active' state" counter. Thereafter, again, in response to the operation depicted in method step 603, method step 605 shows adding one to the "number of pool A devices in 'standby' state" counter.

35           Method steps 606-610 function in substantially the same fashion as method steps 306-310, described above. In the event that the inquiry of method step 610 yields determination that the user has marked the performance of at least one task unacceptable, the process proceeds to method step 612, wherein is depicted that for the

application under test, the process defines the lower bounds of "standard performance" to be a system having a number of pool A active devices equal to the current value within the "number of pool A devices in 'active' state" counter, and a number of pool A devices in an standby state equal to the current value within the "number of pool A devices in 'standby' state" counter. Thereafter, the process proceeds to method step 614 and stops.

In the event that the inquiry of method step 610 yields a determination that the user has NOT marked the performance of at least one task unacceptable, the process proceeds to method step 603 and proceeds from that point.

Figures 3-6 have defined the upper bound of the "standard performance" mode, and the lower bound of the "maximum battery life" mode. Consequently, one bound remains to be defined: the boundary between the lower end of the standard performance mode and the upper end of the maximum battery life mode. In one embodiment, the boundary between the standard performance mode and the maximum battery life mode is defined to be as follows: (1) if there is at least one inactive device in pool A, the lower bound of the standard performance mode is defined as having one or more of the at least one inactive devices of the defined pool A activated; or (2) if all devices in pool A are already activated, moving one or more Pool B devices to Pool A and activating them.

The foregoing description of Figures 3-6 has illustrated a process whereby the pooling policies associated with a particular application are to be determined for a particular human user. In one embodiment, a large number of human users are subjected to the processes described in relation to Figures 3-6, and thereafter statistical techniques are utilized with the results generated on the large number of human users to generate profiles for the application under test which should be acceptable across a broad range of human users. For example, the number of active and standby devices in pool A which define the lower bound of the maximum battery life zone could be an average drawn on the results of the processes of Figures 3-6 over a large number of persons. Other more sophisticated statistical techniques could also be applied.

With reference now to Figure 7, depicted a pictorial representation of a conventional data processing system which can be utilized in accordance with illustrative embodiments of the graphical

user interfaces and processes described above. It should be noted that a graphical user interface systems (e.g., Microsoft Windows 98 or Microsoft Windows NT operating systems) and methods can be utilized with the data processing system depicted in Figure 7. Data processing system 720 is depicted which includes system unit housing 722, video display device 724, keyboard 726, mouse 728, and microphone 748. Data processing system 720 may be implemented utilizing any suitable computer such as a DELL portable computer system, a product of Dell Computer Corporation, located in Round Rock, Texas; Dell is a trademark of Dell Computer Corporation.

Referring now to Figure 8, depicted are selected components of data processing system 720 in which illustrative embodiments of the graphical user interfaces and processes described above can be implemented. Data processing system 720 includes Central Processing Unit ("CPU") 831 (wherein are depicted microprocessor 809, L1 Cache 811, and L2 Cache 813). CPU 831 is coupled to CPU bus 815.

CPU bus 815 is coupled to AGP-enabled Northbridge 804, which serves as a "bridge" between CPU bus 815, AGP interconnect 802 (a type of data bus), and system memory bus 803. In going from one type of bus to another type of bus, a "bridge" is generally needed because the two different type buses speak a different "language." The term "AGP-enabled" is intended to mean that the so-referenced components are engineered such that they interface and function under the standards defined within the AGP interface specification (Intel Corporation, Accelerated Graphics Port Interface Specification).

Generally, each bus in a system utilizes an independent set of protocols (or rules) to conduct data, which are generally set forth in a product specification uniquely tailored to the type of bus in question (e.g., the PCI local bus specification and the AGP interface specification). These protocols are designed into a bus directly and such protocols are commonly referred to as the "architecture" of the bus. In a data transfer between different bus architectures, data being transferred from the first bus architecture may not be in a form that is usable or intelligible by the receiving second bus architecture. Accordingly, communication problems may occur when data must be transferred between different types of buses, such as transferring data from a PCI device on a PCI bus to a CPU on a CPU bus. Thus, a mechanism is developed for "translating" data that are required to be transferred from one bus architecture to another. This translation mechanism is normally contained in a hardware device

in the form of a bus-to-bus bridge (or interface) through which the two different types of buses are connected. This is one of the functions of AGP-enabled Northbridge 804, as well as the Southbridge 822, in that it is to be understood that such bridges can translate and coordinate between various data buses and/or devices which communicate through the bridges.

AGP interconnect 802 interfaces with AGP-enabled graphics controller 800, which interconnects with video display device 724 via video display bus 814. AGP-enabled graphics controller 800 also interconnects with video display device 724 via video display bus 817.

AGP-enabled Northbridge 804 interfaces with system memory bus 803. System memory bus 803 interfaces with system memory 816, which can contain various types of memory devices such as DRAM chip 830, but which also can contain synchronous DRAM, Rambus DRAM, other type memory chips. In addition, shown for sake of illustration is that data processing system 720 includes control program 851 which resides within system memory 816 and which is executed and/or operated on by CPU 831. Control program 851 contains instructions that when executed on CPU 831 carries out application program (e.g., videoconferencing software) operations.

AGP-enabled Northbridge interfaces with Peripheral Component Interconnect (PCI) bus 818, upon which are shown various PCI Input-Output (I/O) devices 850, 852, and 854. Peripheral Component Interconnect (PCI) bus 818 interfaces with Southbridge 822.

Southbridge 822 serves as a bridge between PCI bus 818 and I/O (or ISA) bus 819, 1394 Device 825, and network card 827. I/O bus 819 interfaces with ROM 821, which for sake of illustration is shown containing system BIOS 823.

I/O bus 819 interfaces with I/O controller 839 for connecting peripheral devices (e.g., disk and tape drives 833) to I/O bus 819. I/O controller 839 interfaces with user interface adapter 840 for connecting keyboard 726, mouse 728, speaker 846, microphone 748, and/or other user interface devices, such as a touch screen device (not shown), to I/O bus 819 through I/O controller 839.

Video display device 724 is the visual output of data processing system 720, which can be a CRT-based video display well-known in the art of computer hardware. However, with a portable or

notebook-based computer, video display device 724 can be an LCD-based, or a gas plasma-based, or any other type of flat-panel display.

Any suitable machine-readable media may retain the graphical user interface, such as DRAM 830, ROM 821, a magnetic diskette, magnetic tape, or optical disk (the last three being located in disk and tape drives 833). Any suitable operating system such as one having an associated graphical user interface (e.g., Microsoft Windows or Microsoft NT) may direct CPU 831. Other technologies can also be utilized in conjunction with CPU 831, such as touch-screen technology or human voice control.

Those skilled in the art will appreciate that the hardware depicted in Figure 8 may vary for specific applications. For example, other peripheral devices such as optical disk media, audio adapters, video cameras such as those used in videoconferencing, or programmable devices, such as PAL or EPROM programming devices well-known in the art of computer hardware, and the like may be utilized in addition to or in place of the hardware already depicted.

Those skilled in the art will recognize that data processing system 720 can be described in relation to data processing systems which perform essentially the same functions, irrespective of architectures. For example, another example of such data processing systems, wherein embodiments of the processes and devices described above may be implemented, appears in an Intel Corporation whitepaper, entitled *Intel 820 Chipset: A Revolutionary Architecture for Mainstream Performance PCs in 2000*, which is hereby incorporated by reference in its entirety (see especially Figure 2, page 6, of the whitepaper). This whitepaper is available from of Intel Corporation of Santa Clara, California.

Other embodiments are within the following claims.

While particular embodiments of the present invention have been shown and described, it will be obvious to those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from this invention and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and scope of this invention. Furthermore, it is to be understood that the invention is solely defined by the appended claims. It will be understood by those within the art that if a



specific number of an introduced claim element is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases "at least one" and "one or more" to introduce claim elements. However, the use of such phrases should not be construed to imply that the introduction of a claim element by the indefinite articles "a" or "an" limits any particular claim containing such introduced claim element to inventions containing only one such element, even when the same claim includes the introductory phrases "one or more" or "at least one" and indefinite articles such as "a" or "an"; the same holds true for the use of definite articles used to introduce claim elements. In addition, even if a specific number of an introduced claim element *is* explicitly recited, those skilled in the art will recognize that such recitation should typically be interpreted to mean *at least* the recited number (e.g., the bare recitation of "two elements," without other modifiers, typically means *at least* two elements, or *two or more* elements).

WHAT IS CLAIMED IS:

- 1           1.     A method comprising:  
2           recalling at least one memory pooling profile, in response to  
3           user input; and  
4           pooling data processing system memory devices in response to  
5           the at least one memory pooling profile.
  
- 1           2.     The method of Claim 1, wherein said recalling at least  
2           one memory pooling profile, in response to user input further  
3           includes:  
4           accepting user input specifying at least one application  
5           program to be run on a data processing system.
  
- 1           3.     The method of Claim 2, wherein said accepting user input  
2           specifying at least one application to be run on a data processing  
3           system further includes:  
4           accepting graphical user interface input specifying at least  
5           one application program selected from the group  
6           comprising a word processing program, a palm-top  
7           organizer program, a calendar program, a web browser  
8           program, a communications package program, a voice  
9           recognition program, and a spread sheet program.
  
- 1           4.     The method of Claim 1, wherein said recalling at least  
2           one memory pooling profile, in response to user input further  
3           includes:  
4           accepting user input specifying at least one power/performance  
5           level.
  
- 1           5.     The method of Claim 4, wherein said accepting user input  
2           specifying at least one power/performance level further includes:  
3           accepting graphical user interface input specifying at least  
4           one power/performance level selected from the group  
5           comprising maximum performance, standard performance --  
6           high end, standard performance -- low end, and maximum  
7           battery life.

1           6.     The method of Claim 5, wherein the maximum performance  
2 power/performance level further includes:  
3           at least a number of active and standby devices substantially  
4           equivalent to an empirically determined minimum number of  
5           active and standby devices in a pool A associated with a  
6           maximum performance zone of a data processing system  
7           running at least one specified application program.

1           7.     The method of Claim 5, wherein the standard performance -  
2 - high end power/performance level further includes:  
3           at least a number of active and standby devices substantially  
4           equivalent to an empirically determined minimum number of  
5           active and standby devices in a pool A associated with a  
6           standard performance -- high end zone of a data  
7           processing system running at least one specified  
8           application program.

1           8.     The method of Claim 5, wherein the standard performance -  
2 - low end power/performance level further includes:  
3           at least a number of active and standby devices substantially  
4           equivalent to an empirically determined minimum number of  
5           active and standby devices in a pool A associated with a  
6           standard performance -- low end zone of a data processing  
7           system running at least one specified application  
8           program.

1           9.     The method of Claim 5, wherein the maximum battery life  
2 power/performance level further includes:  
3           at least a number of active and standby devices substantially  
4           equivalent to an empirically determined minimum number of  
5           active and standby devices in a pool A associated with a  
6           maximum battery life zone of a data processing system  
7           running at least one specified application program.

1           10.    The method of Claim 1, wherein said pooling data  
2 processing system memory devices in response to the at least one  
3 memory pooling profile further includes:  
4           placing RDRAM memory devices in a Pool A and designating one or  
5           more of the RDRAM devices to be in either active or  
6           standby states.

1           11.    The method of Claim 1, wherein said pooling data  
2    processing system memory devices in response to the at least one  
3    memory pooling profile further includes:  
4           placing RDRAM memory devices in a Pool B.

587443 v1

1 12. A computer system comprising:  
2 signal bearing media bearing  
3 means for recalling at least one memory pooling profile,  
4 in response to user input; and  
5 means for pooling data processing system memory devices  
6 in response to the at least one memory pooling  
7 profile.

1 13. The computer system of Claim 12, wherein said signal  
2 bearing media further includes:  
3 recordable media selected from the group comprising a hard  
4 drive, a Compact Disk, a read only memory, a random  
5 access memory, and a floppy disk.

1 14. The computer system of Claim 12, wherein said signal  
2 bearing media further includes:  
3 transmission media selected from the group comprising a web  
4 site, a computer file, and random access memory.

1 15. The computer system of Claim 12, wherein said means for  
2 recalling at least one memory pooling profile, in response to user  
3 input further includes:  
4 means for accepting user input specifying at least one  
5 application program to be run on a data processing  
6 system.

1 16. The computer system of Claim 15, wherein said means for  
2 accepting user input specifying at least one application to be run on  
3 a data processing system further includes:  
4 means for accepting graphical user interface input specifying  
5 at least one application program selected from the group  
6 comprising a word processing program, a palm-top  
7 organizer program, a calendar program, a web browser  
8 program, a communications package program, a voice  
9 recognition program, and a spread sheet program.

1 17. The computer system of Claim 12, wherein said means for  
2 recalling at least one memory pooling profile, in response to user  
3 input further includes:  
4 means for accepting user input specifying at least one  
5 power/performance level.

1 18. The computer system of Claim 17, wherein said means for  
2 accepting user input specifying at least one power/performance level  
3 further includes:

4 means for accepting graphical user interface input specifying  
5 at least one power/performance level selected from the  
6 group comprising maximum performance, standard  
7 performance -- high end, standard performance -- low end,  
8 and maximum battery life.

1 19. The computer system of Claim 18, wherein the maximum  
2 performance power/performance level further includes:  
3 at least a number of active and standby devices substantially  
4 equivalent to an empirically determined minimum number of  
5 active and standby devices in a pool A associated with a  
6 maximum performance zone of a data processing system  
7 running at least one specified application program.

1 20. The computer system of Claim 18, wherein the standard  
2 performance -- high end power/performance level further includes:  
3 at least a number of active and standby devices substantially  
4 equivalent to an empirically determined minimum number of  
5 active and standby devices in a pool A associated with a  
6 standard performance -- high end zone of a data  
7 processing system running at least one specified  
8 application program.

1 21. The computer system of Claim 18, wherein the standard  
2 performance -- low end power/performance level further includes:  
3 at least a number of active and standby devices substantially  
4 equivalent to an empirically determined minimum number of  
5 active and standby devices in a pool A associated with a  
6 standard performance -- low end zone of a data processing  
7 system running at least one specified application  
8 program.

1 22. The computer system of Claim 18, wherein the maximum  
2 battery life power/performance level further includes:  
3 at least a number of active and standby devices substantially  
4 equivalent to an empirically determined minimum number of  
5 active and standby devices in a pool A associated with a

6 maximum battery life zone of a data processing system  
7 running at least one specified application program.

1 23. The computer system of Claim 12, wherein said means for  
2 pooling data processing system memory devices in response to the at  
3 least one memory pooling profile further includes:

4 means for placing RDRAM memory devices in a Pool A and  
5 designating one or more of the RDRAM devices to be in  
6 either active or standby states.

1 24. The computer system of Claim 12, wherein said means for  
2 pooling data processing system memory devices in response to the at  
3 least one memory pooling profile further includes:

4 means for placing RDRAM memory devices in a Pool B.

RAMBUS MEMORY POWER MANAGEMENT THROUGH ACTIVE POOL MANAGEMENT  
POLICIES TAILORED TO PORTABLE COMPUTER USER SCENARIOS

Gary J. Verdun

ABSTRACT

- 5           A method and related computer system that allow recalling at least one memory pooling profile, in response to user input, and pooling data processing system memory devices in response to the at least one memory pooling profile.



## Graphical User Interface

150

### Application Specification 100

Categories	Please Select One or More
Word Processing	<input type="radio"/>
Palm-Top Organizer	<input type="radio"/>
Calendar Program	<input type="radio"/>
Web Browser	<input type="radio"/>
Communications Package	<input type="radio"/>
Voice Recognition	<input type="radio"/>
Spread Sheet	<input type="radio"/>

### Performance/Power Levels Specification 102

Categories	Please Select One
Maximum performance	<input type="radio"/>
Standard Performance -- High End	<input type="radio"/>
Standard Performance -- Low End	<input type="radio"/>
Maximum Battery Life	<input type="radio"/>

Fig. 1A

## Graphical User Interface

150

### Application Specification 100

Categories

Please Select  
One or More

Word Processing  
Palm-Top Organizer  
Calendar Program  
Web Browser  
Communications Package  
Voice Recognition  
Spread Sheet

☐  
☐  
☐  
☐  
☐  
☐  
☐

### Performance/Power Levels Specification

102

Categories

Please Adjust  
Slider

Maximum performance  
Standard Performance -- High End  
Standard Performance -- Low End  
Maximum Battery Life




FIG. 1B

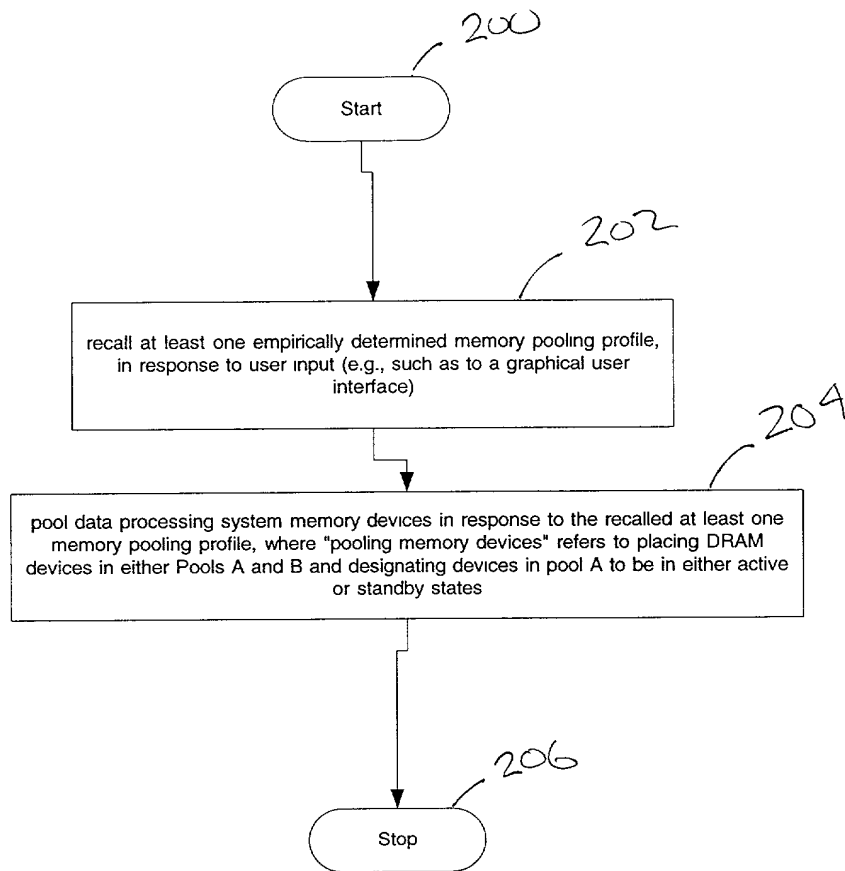


FIG. 2

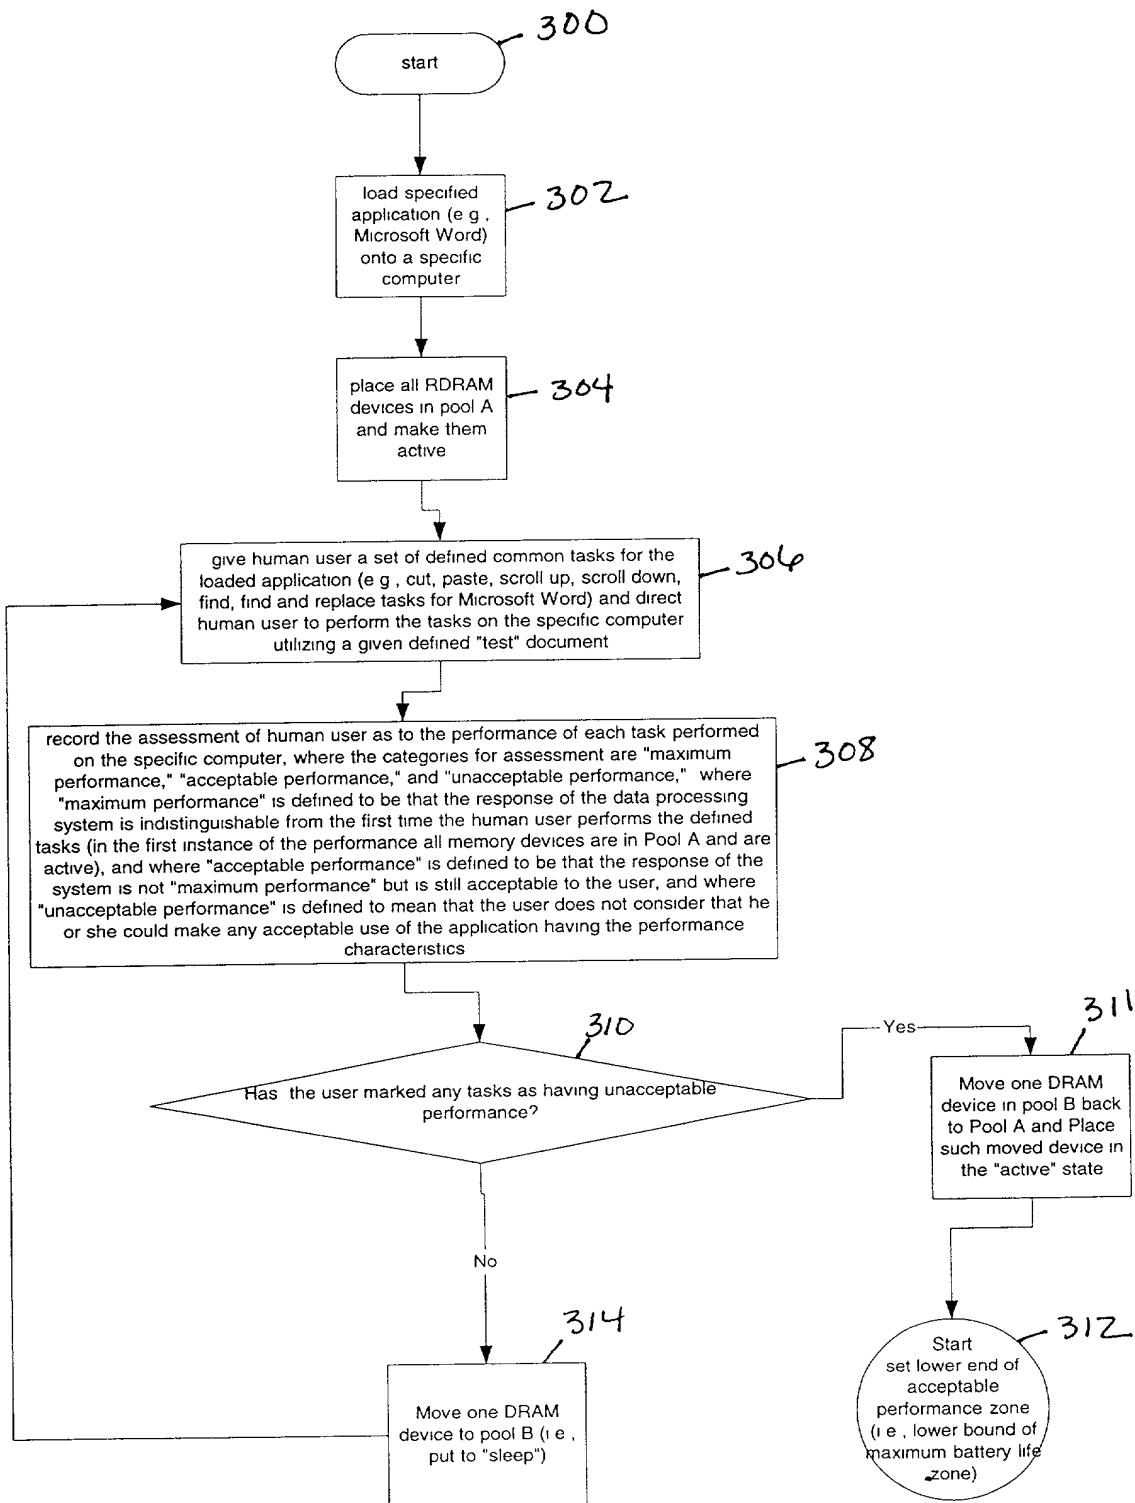


FIG. 3

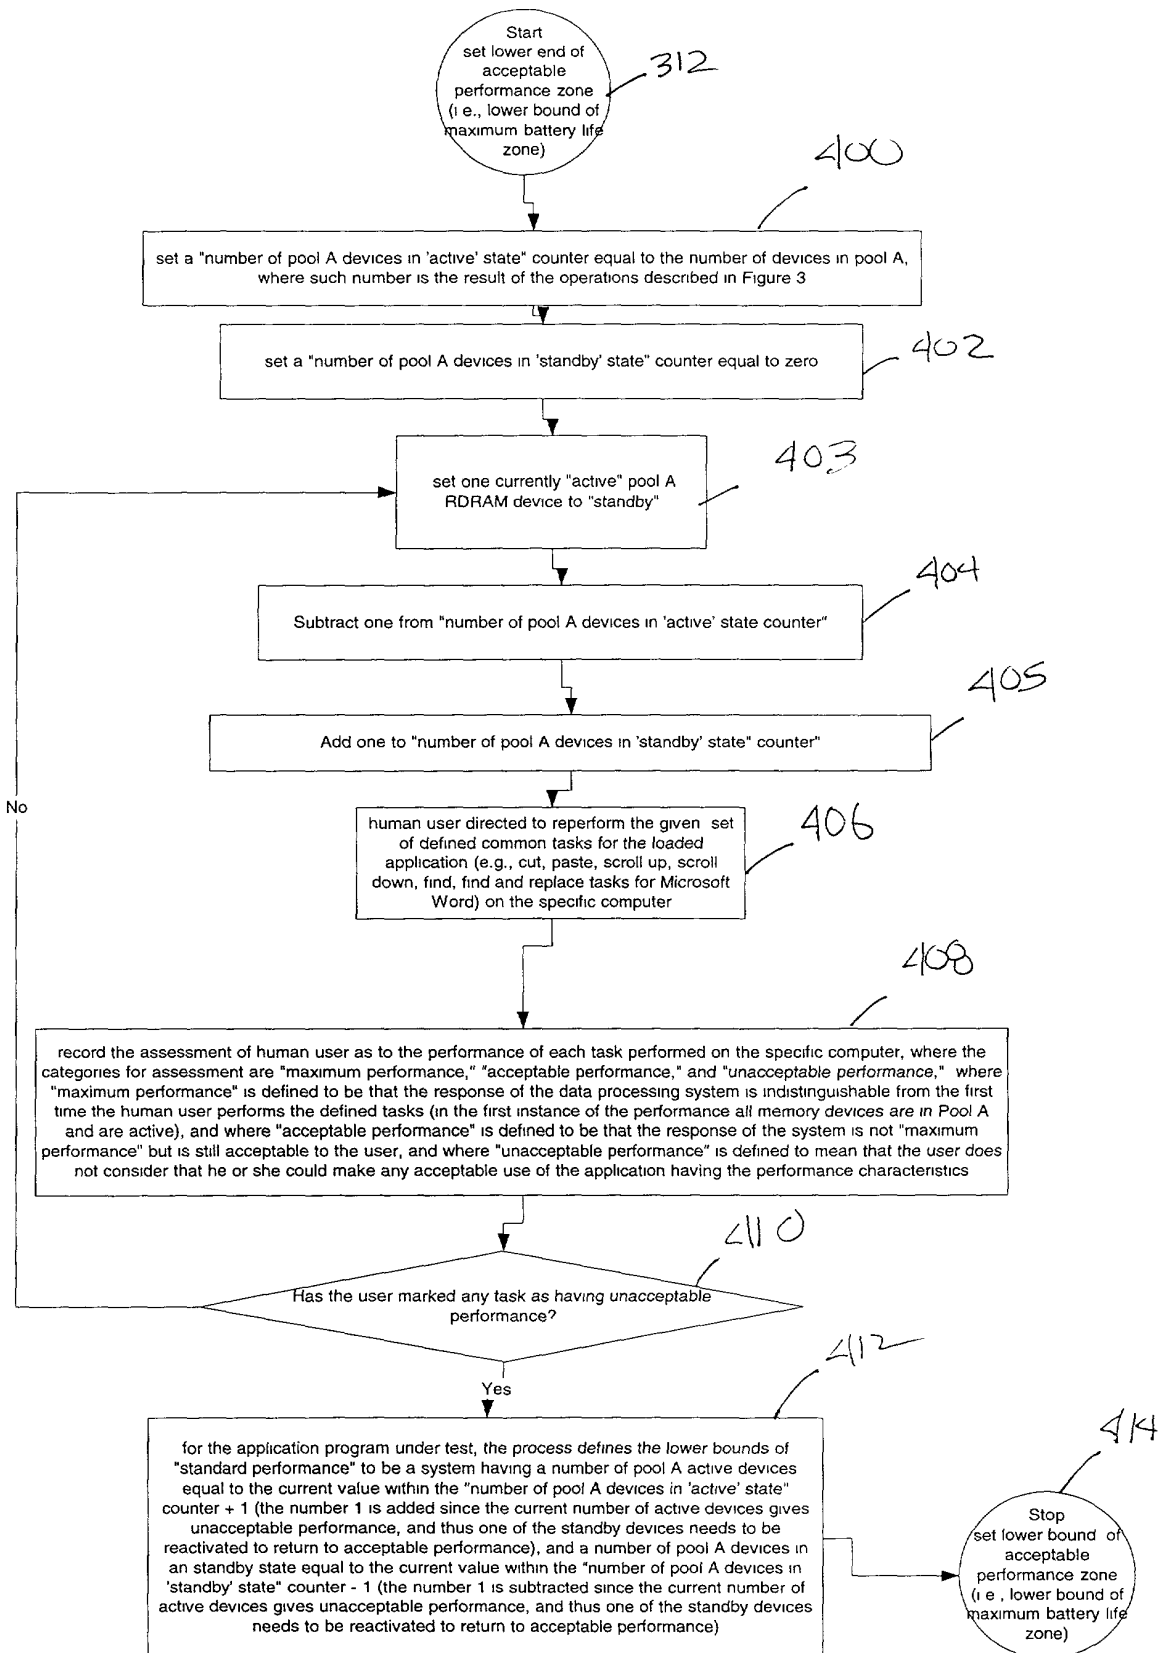


FIG. 4

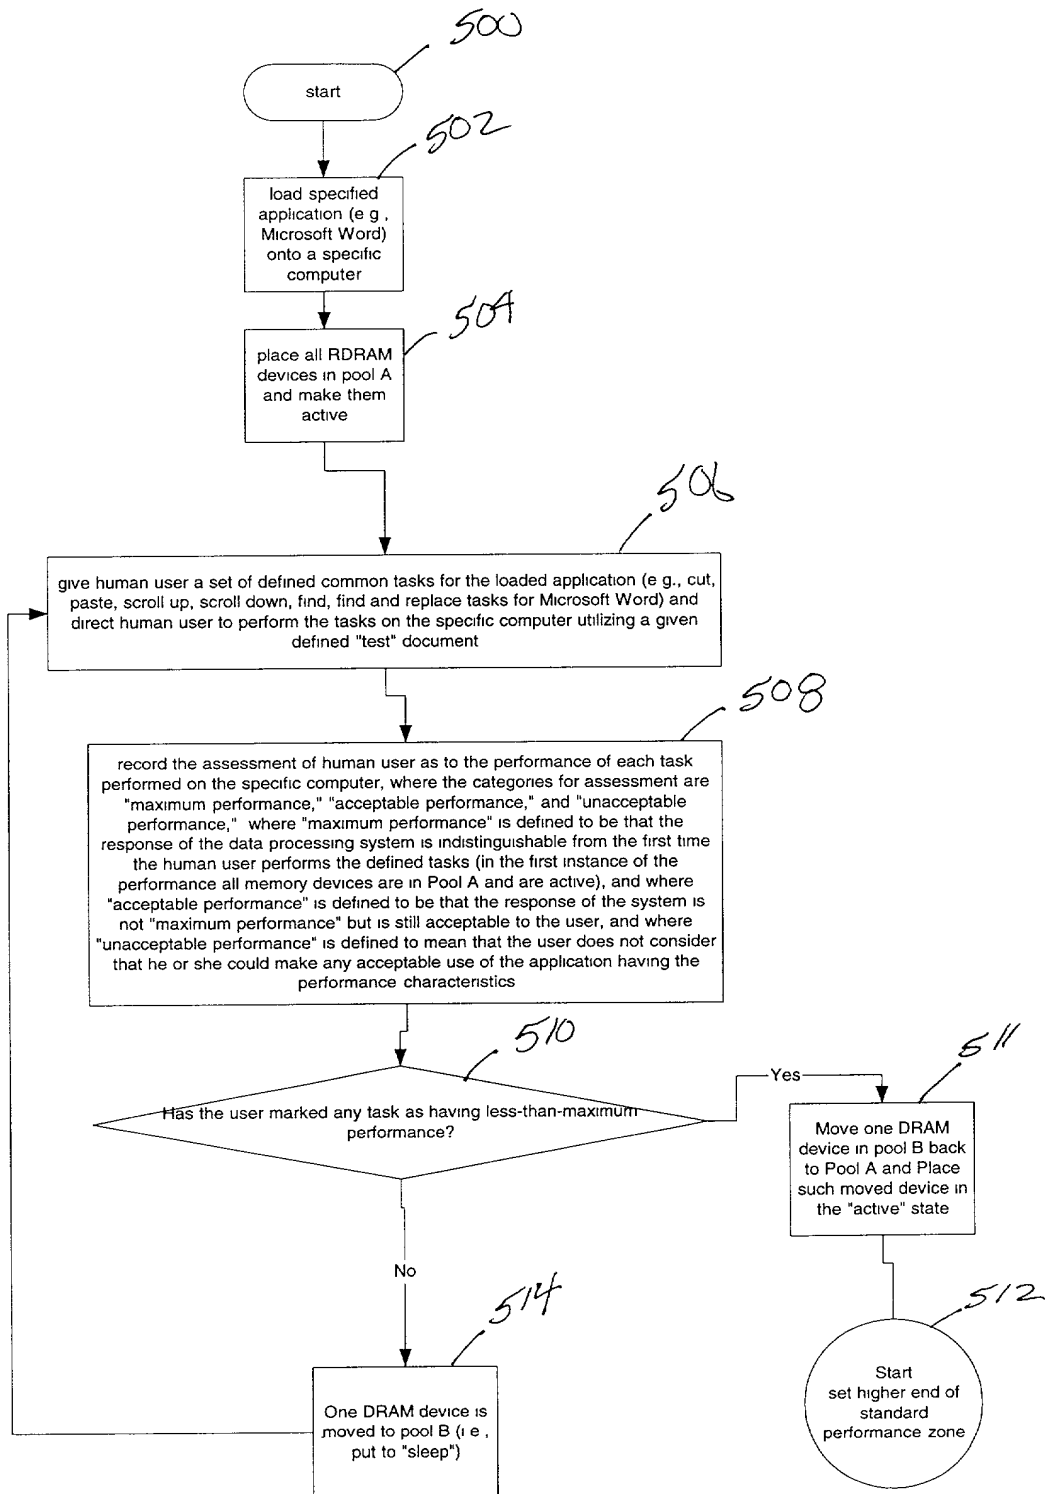


FIG. 5

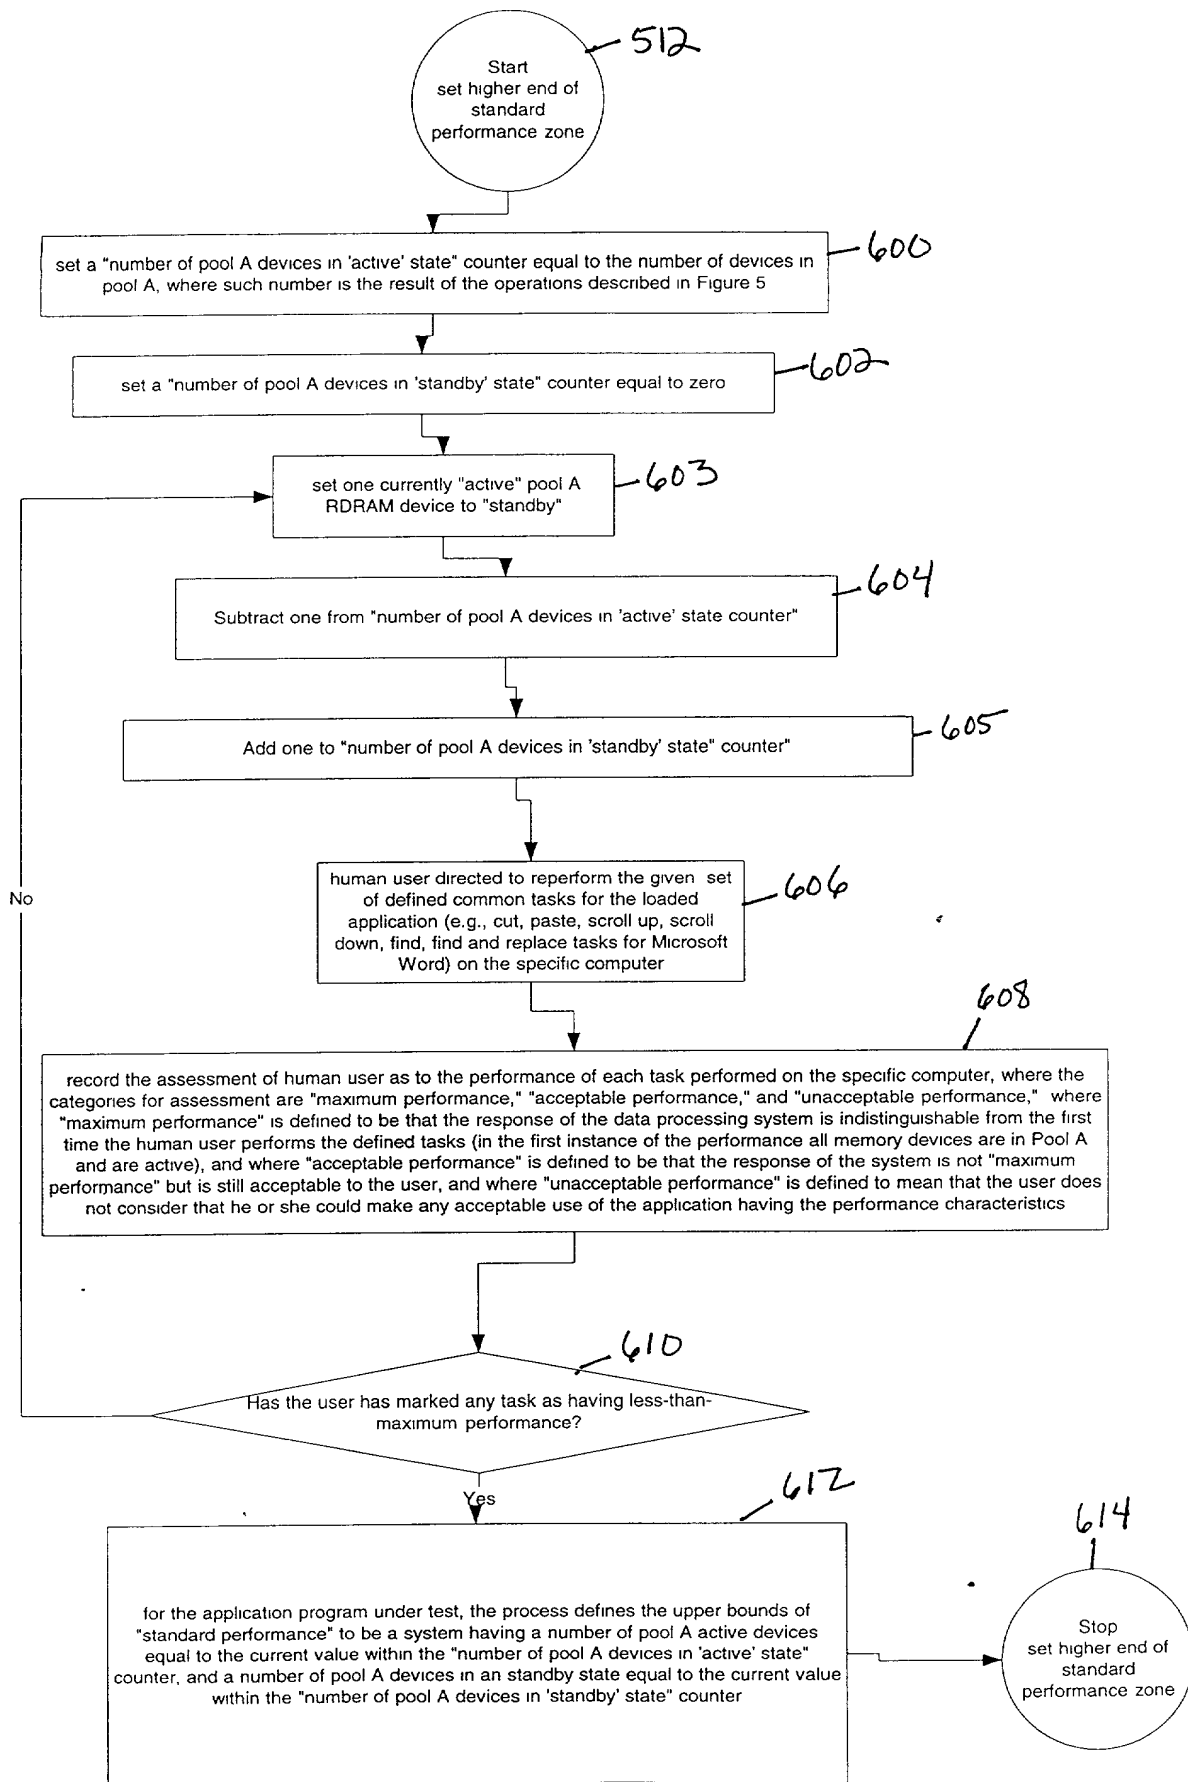


FIG. 6


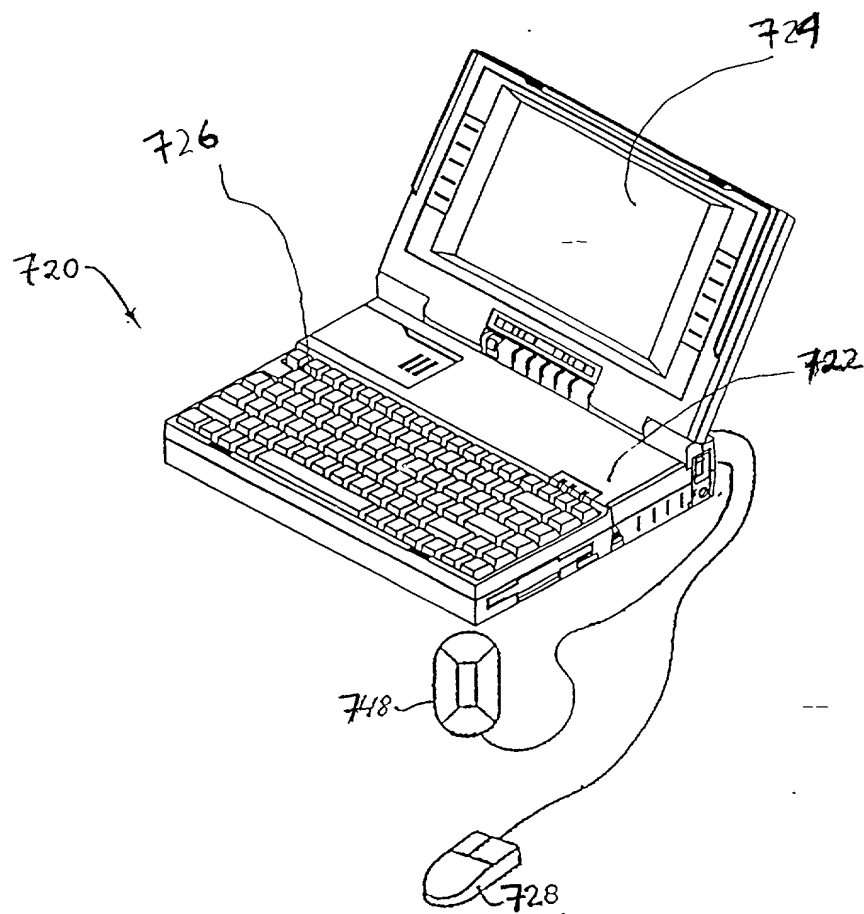


FIG 7



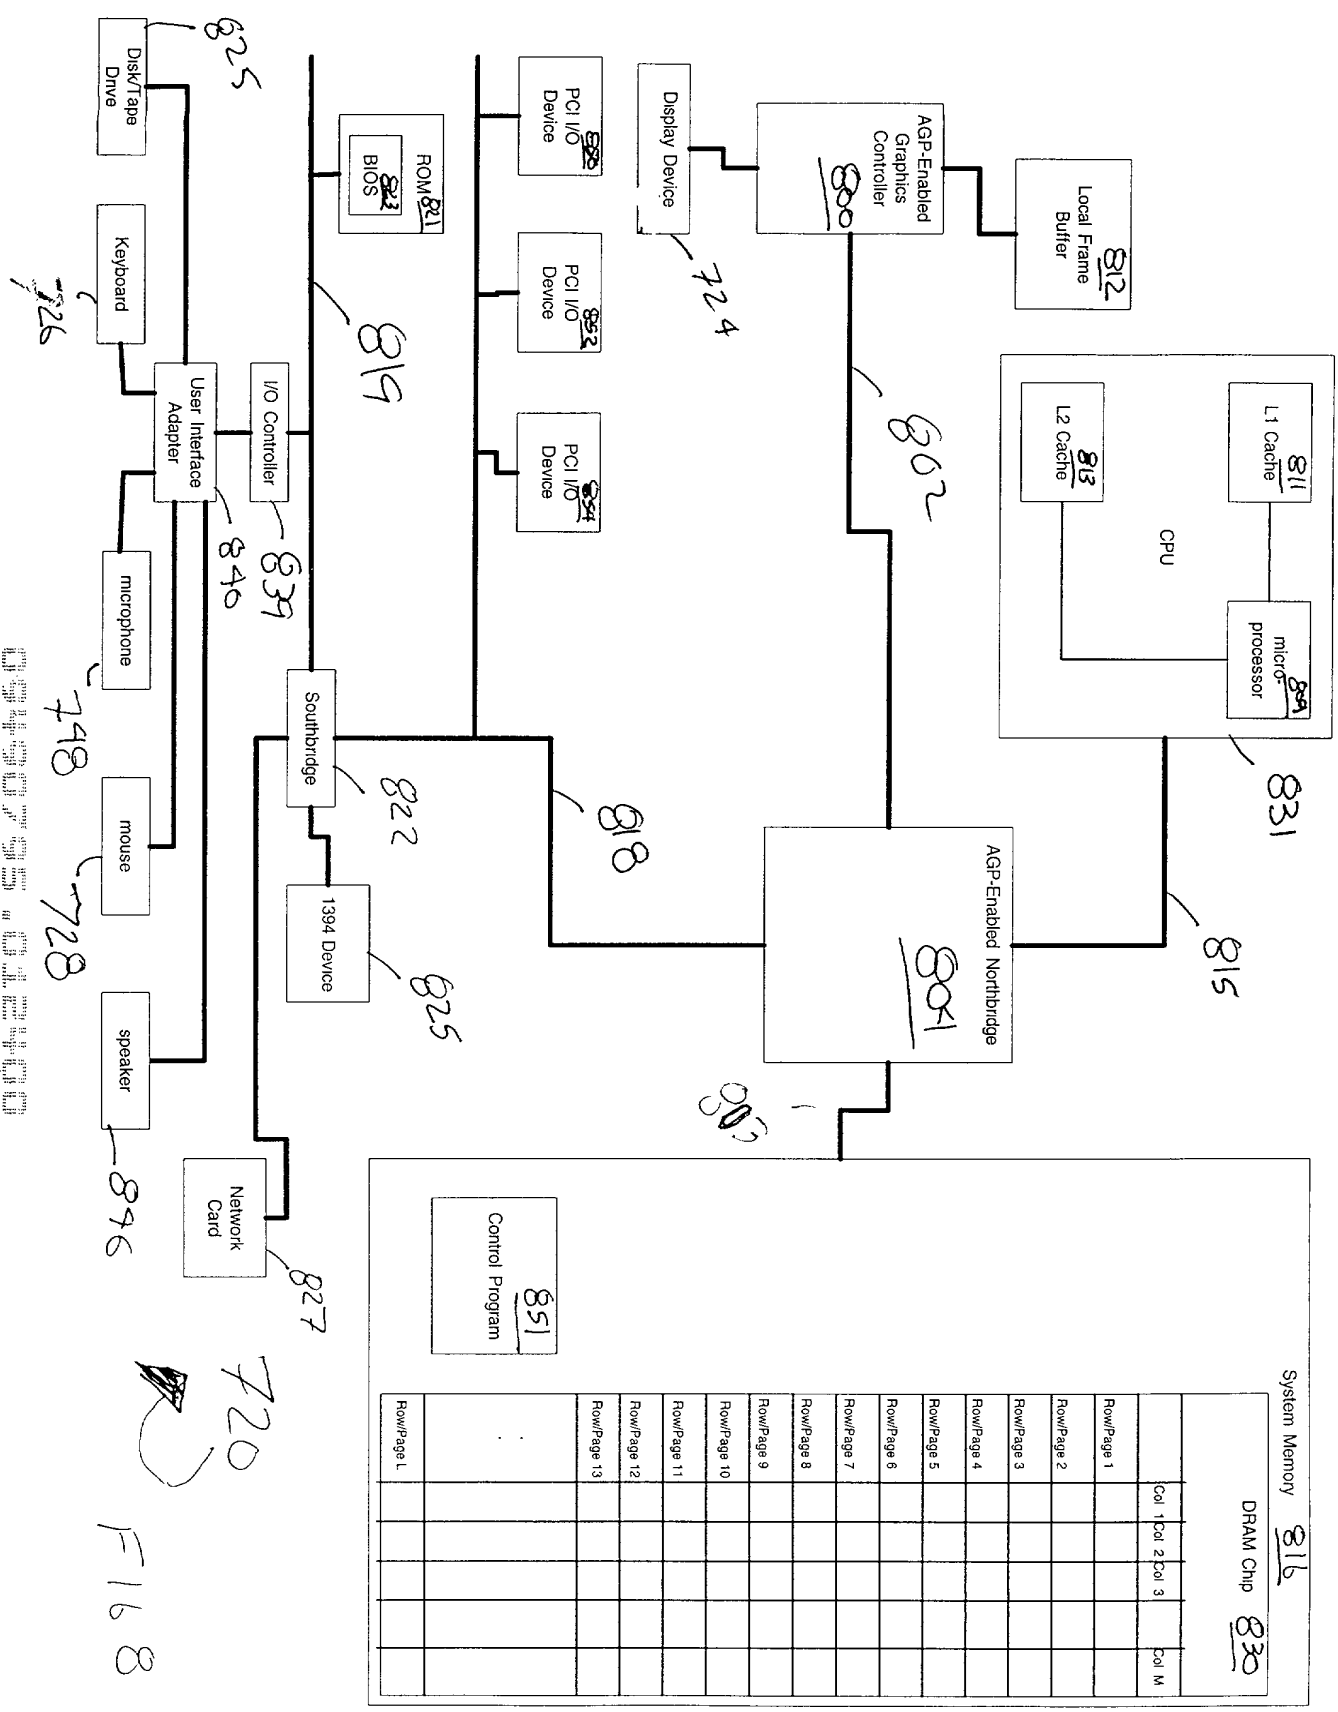

System Memory 816

DRAM Chip 830			
	Col 1	Col 2	Col 3
Row/Page 1			
Row/Page 2			
Row/Page 3			
Row/Page 4			
Row/Page 5			
Row/Page 6			
Row/Page 7			
Row/Page 8			
Row/Page 9			
Row/Page 10			
Row/Page 11			
Row/Page 12			
Row/Page 13			
Row/Page L			

## DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter (process, machine, manufacture, or composition of matter, or an improvement thereof) which is claimed and for which a patent is sought by way of the application entitled

### Rambus Memory Power Management Through Active Pool Management Policies Tailored To Portable Computer User Scenarios

which (check) ☒ is attached hereto.

☐ and is amended by the Preliminary Amendment attached hereto.

☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_

☐ and was amended on \_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
Number	Country	Day/Month/Year Filed	Yes	No
N/A			<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Provisional Application Number	Filing Date
N/A	

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information, which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)
N/A		

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith:

Alan H. MacPherson (24,423); Brian D. Ogonowsky (31,988); David W. Heid (25,875); Norman R. Klivans (33,003); Edward C. Kwok (33,938); David E. Steuber (25,557); Michael Shenker (34,250); Stephen A. Terrile (32,946); Peter H. Kang (40,350); Ronald J. Meetin (29,089); Ken John Koestner (33,004); Omkar K. Suryadevara (36,320); David T. Millers (37,396); Kent B. Chambers (38,839); Michael P. Adams (34,763); Robert B. Morrill (43,817); Michael J. Halbert (40,633); Gary J. Edwards (41,008); James E. Parsons (34,691); Daniel P. Stewart (41,332); Philip W. Woo (39,880); John T. Winburn (26,822); Tom Chen (42,406); Fabio E. Marino (43,339); William W. Holloway (26,182); Don C. Lawrence (31,975); Marc R. Ascolese (42,268); Carmen C. Cook (42,433); David G. Dolezal (41,711); Roberta P. Saxon (43,087); Mary Jo Bertani (42,321); Dale R. Cook (42,434); Sam G. Campbell (42,381); Matthew J. Brigham (44,047); Hugh H. Matsubayashi (43,779); Margaret M. Kelton (44,182); Joseph T. VanLeeuwen (44,383); Patrick D. Benedicto (40,909); T.J. Singh (39,535); Shireen Irani Bacon (40,494); Rory G. Bens (44,028); George Wolken, Jr. (30,441); John A. Odozynski (28,769); Cameron K. Kerrigan (44,826); Barmak S. Sani (45,068); Kenneth C. Brooks (38,393); Henry N. Garrana (27,887); Paul E. Lewkowicz (Reg. No. 44,870); Theodore P. Lopez (44,881); Mark P. Kahler (29,178); Michelle M. Turner (35,724); Diana L. Roberts (36,654); and Anthony E. Peterman (38,270).

Please address all correspondence and telephone calls to:

Dale R. Cook  
Attorney for Applicant(s)  
**SKJERVEN, MORRILL, MacPHERSON, FRANKLIN & FRIEL LLP**  
25 Metro Drive, Suite 700  
San Jose, California 95110-1349

Telephone: 512-794-3600  
Facsimile: 512-794-3601

I declare that all statements made herein of my own knowledge are true, all statements made herein on information and belief are believed to be true, and all statements made herein are made with the knowledge that whoever, in any matter within the jurisdiction of the Patent and Trademark Office, knowingly and willfully falsifies, conceals, or covers up by any trick,

Inventor's Signature: Larry J. Varden Date: 1/24/2000  
Residence: Belton, Texas

Citizenship: United States